


NOTES:

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOW
- 2 - IL<0.35dB, RL>50dB, 1310nm & 1550nm
IL CONNECTOR VALUE ACCORDING IEC 61300-3-4 method B
RL CONNECTOR VALUE ACCORDING IEC 61300-3-6
- 3 - VISUAL ASPECT CHECK ACCORDING TO IEC 61300-3-35
END FACE GEOMETRY ACCORDING TO IEC 61755-3-31
- 4 - TYPE OF POLARITIES ACCORDING TO SPECIFICATION SHEET

LENGTH TOLERANCE		
Length interval [m]	Tolerance [m]	
1 - 7.99	+	0.11
	-	0
8 - 19.99	+	0.18
	-	0
20 - 49.99	+	0.23
	-	0
50 - 99.99	+	0.50
	-	0
100 - 199.99	+	1.00
	-	0
200 - 299.99	+	1.50
	-	0
>300	+	3.00
	-	0

ORDERING CODE:

NKOP16X-A-0-X

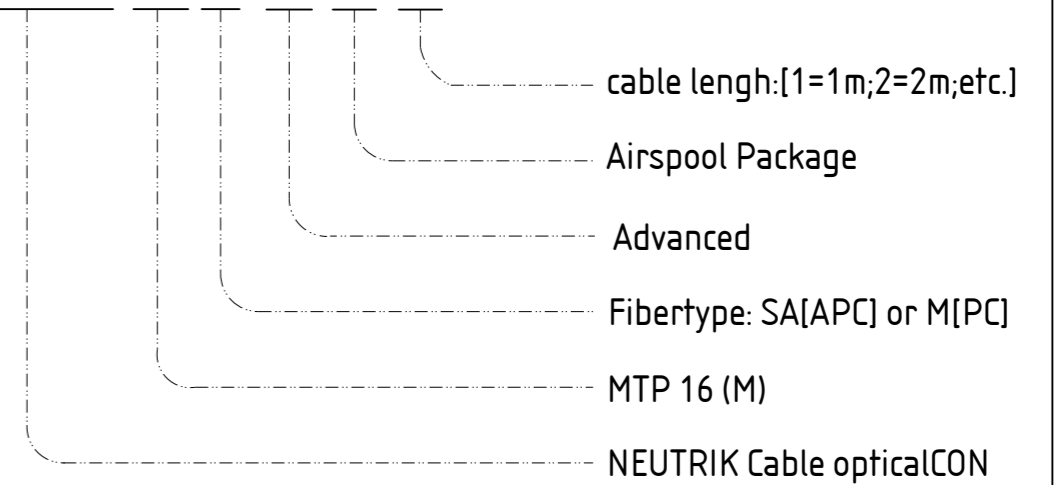

Sheet Number 1/1	Projection 	Scale 1:1	Format A3	General Tolerancing ISO 2768 mK	
Description			Created on/by 09.07.2024	Schuster R.	
MTP16 Patchcord			Approved on/by		
			Article ID	Model ID	Drawing ID
Status			Revision 1	ECN Number -	Neutrik Group